



Paper Industry Lubricants Lubchemicals

Specialized Lubricants for Future Technology
Professional Lubrication

Contents

LubC, Hydraulic M	3	LubC, Gear TF	23
LubC, Hydraulic MZ	4	LubC, Chain ST	24
LubC, Hydraulic T	5	LubC, Grease L	25
LubC, Hydraulic TZ	6	LubC, Grease L Plus	26
LubC, Hydraulic T Plus	7	LubC, Gear EP	27
LubC, Hydraulic TZ Plus	8	LubC, Gear EP Plus	28
LubC, Comp R Plus	9	LubC, Grease LC SD	29
LubC, Comp Super R Plus	10	LubC, Grease LC HD	30
LubC, Comp R S	11	LubC, Grease LC Moly EP	31
LubC, Gear HP	12	LubC, Grease LPlex	32
LubC, Gear HP Plus	13	LubC, Grease LPlex Plus	33
LubC, Gear PA	14	LubC, Grease CPlex EP	34
LubC, Gear PG	15	LubC, Grease CSPlex	35
LubC, Diesel HD	16	LubC, Grease PU Plus	36
LubC, Diesel SD	17	LubC, Grease ALPlex OG	37
LubC, Diesel Gas LA	18	LubC, Grease PU SPAHVPlus	38
LubC, HTF Plus	19		
LubC, Spin	20		
LubC, Paper mill	21		
LubC, ATF	22		



About Us

LUBCHEMICALS :THE NUMBER ONE LUBRICANT & CHEMICAL SPECIALIST...

Just meaningless words? Absolutely not! For over 30 years, we have been focusing exclusively on developing and manufacturing of premium chemicals and lubricants. Whatever the application for which you require a product, we will have it. Special paper industry lubricants involve mineral and synthetic oils such as hydraulic oils, compressor oils, turbine oils, gear oils, engine oils, heat transfer oils, circulation oils, metal working oils, vaccum pump oils also specialty greases involve lithium, lithium complex, calcium, calcium complex, calcium solphanate complex, calcium poly urea, aluminum complex greases and lubricant pastes.

As an independent manufacturer we can quickly respond to market developments. We keep a close eye on technical trends. In addition, we develop custom-made solutions for many specific requirements our customers have.

International appeal with a 'German heart'.

Not only Made in Germany, but also compliant with internationally applicable specifications and exported worldwide. Our production are ISO certified to reassure you of our commitment to the highest quality standards.

More than just chemicals & lubricants!

A technical product requires knowledge - knowledge that we are eager to share with you. This is the right place for the best product advice; In addition.



PRGK Co.

Supply and distribution of
special lubricants in Iran

LUBCHEMICALS

IBL
JBL
UL
UL





LubC, Hydraulic M

LubC, Hydraulic M is a premium quality multi – purpose lubricating oil, based on group II base stock, designed for use in hydraulic systems in industrial and mobile services, circulating systems and where R&O type of oils are required. Also blended from high – quality base stocks and stabilized zink additive system , supporting the performance requirments of DIN 51524 part1 (HM)

▪ **Viscosity Index (approx.)**

105

▪ **Base Oil Vis. @ 40 °C**

15 :14.4	22 : 22	32 :33
46 :46.5	68 :68	100 :101

▪ **Pour Point / Flash Point °C**

15 : -30 / 210	22 : -30 / 215	32 : -30 / 225
46 : -30 / 230	68 : -24 / 237	100 : -24 / 245

▪ **ISO VG**

15/ 22 / 32 / 46 / 68 / 100



Manufactured
under Germany
technology license 



LubC, Hydraulic MZ

LubC, Hydraulic MZ is an ash less (Zinc-free) high – performance hydraulic fluid, based on group II base stock, designed for use in hydraulic systems containing silver or silver – plated parts, operating under medium pressure and requiring medium degree of load-carrying capability and also suitable for hydraulic pumps and hydraulic systems of excavators, cranes, and hydrostatic drives, subjected to outdoor operating conditions .

Viscosity Index (approx.)		
105		
Base Oil Vis. @ 40 °C		
15 : 15	22 : 22.6	32 : 33.6
46 : 46.3	68 : 68.4	100 : 100.5
Pour Point / Flash Point °C		
15 : -30 / 210	22 : -30 / 215	32 : -30 / 225
46 : -30 / 230	68 : -24 / 237	100 : -27 / 245
ISO VG		
15 / 22 / 32 / 46 / 68 / 100		



Manufactured under Germany technology license 



LubC, Hydraulic T

LubC, Hydraulic T is a High performance , anti - wear hydraulic fluid based on group II base stock, It is designed for use in hydraulic systems operating under high pressures and requiring high degree of load – carrying capability. Also suitable for most hydraulic pumps and hydraulic systems of excavators, cranes, and hydrostatic drives subjected to most severe outdoor operating conditions .

▪ **Viscosity Index (approx.)**

142

▪ **Base Oil Vis. @ 40°C**

15 : 15.5	22 : 22	32 : 33.1
46 : 45	68 : 68	100 : 100

▪ **Pour Point / Flash Point °C**

15 : -39 / 200	22 : - 39 / 210	32 : -33 / 215
46 : -33 / 220	68 : -30 / 227	100 : -30 / 235

▪ **ISO VG**

15 / 22 / 32 / 46 / 68 / 100



Manufactured
under Germany
technology license





LubC, Hydraulic TZ

LubC, Hydraulic TZ is an ash less (Zinc-free) high – performance hydraulic fluid based on group II base stock, It is designed for use in hydraulic systems containing silver or silver – plated parts, operating under high pressure and requiring high degree of load-carrying capability and also suitable for hydraulic pumps and hydraulic systems of excavators, cranes, and hydrostatic drives, subjected to most severe outdoor operating conditions.

▪ Viscosity Index (approx.)

143

▪ Base Oil Vis. @ 40 °C

15 : 15.4	22 : 22.3	32 : 33
46 : 44.9	68 : 68	100 : 99.6

▪ Pour Point / Flash Point °C

15 : -39 / 200	22 : -39 / 210	32 : -33 / 215
46 : -33 / 220	68 : -30 / 227	100 : -30 / 235

▪ ISO VG

15 / 22 / 32 / 46 / 68 / 100



Manufactured under Germany technology license



LubC, Hydraulic T Plus

LubC, Hydraulic TPlus is a High performance, anti - wear hydraulic fluid based on group II&III base stocks, It is designed for use in hydraulic systems operating under high pressures and requiring high degree of load - carrying capability as well as suitable for most hydraulic pumps and hydraulic systems of excavators, cranes, and hydrostatic drives subjected to most severe outdoor operating conditions.

• Viscosity Index (approx.)

160

• Base Oil Vis. @ 40 °C

15 : 15.8	22 : 22	32 : 33.6
46 : 44	68 : 68	100 : 100

• Pour Point / Flash Point °C

15 : -42 / 164	22 : -42 / 175	32 : -42 / 170
46 : -42 / 240	68 : -36 / 235	100 : -30 / 246

• ISO VG

15 / 22 / 32 / 46 / 68 / 100



Manufactured
under Germany
technology license 



LubC, Hydraulic TZ Plus

LubC, Hydraulic TZPlus is an ash less (Zinc-free) high – performance hydraulic fluid based on group II&III base stocks, It is designed for use in hydraulic systems containing silver or silver – plated parts, operating under high pressure and requiring high degree of load-carrying capability and also suitable for hydraulic pumps and hydraulic systems of excavators, cranes, and hydrostatic drives, subjected to most severe outdoor operating conditions.

▪ Viscosity Index (approx.)

160

▪ Base Oil Vis. @ 40 °C

15 :15.1	22 :22.4	32 :33.6
46 :46.3	68 : 68.6	100 : 100

▪ Pour Point / Flash Point °C

15 : -42 / 164	22 : -42 / 206	32 : -42 / 208
46 : -42 / 220	68 : -42 / 224	100 : -39 / 237

▪ ISO VG

15 / 22 / 32 / 46 / 68 / 100



Manufactured under Germany technology license



LubC, Comp R Plus

LubC, Comp R Plus is formulated using hydro cracked / iso dewaxed hydrocarbon base fluids. Designed specifically for use in oil flood lubricated positive displacement rotary compressor. It will extend drain intervals up to 2 times longer than conventional mineral oils. (Max-change over time up to 6000 hr.)

Viscosity Index		
32 : 127	46 : 124	68 : 124
Base Oil Vis. @ 40 °C		
32 : 32.2	46 : 46.6	68 : 68.5
Pour Point / Flash Point °C		
32 : -36	, 236	
46 : -33	, 240	
68 : -33	, 244	
ISO VG		
32 / 46 / 68		



Manufactured under Germany technology license



LubC, Comp Super R Plus

LubC, Comp Super R Plus is a heavy duty, based on synthetic PAO & group III base stock compressor oil, containing special oxidation and rust inhibitors. It is designed specifically for use in oil flood lubricated positive displacement rotary compressor. It will extend drain intervals up to 2.5 times longer than conventional mineral oils. (Max-change over time up to 8000 hr.)

▪ Viscosity Index		
32 : 126	46 : 130	68 : 134
▪ Base Oil Vis. @ 40 °C		
32 : 32.2	46 : 46.6	68 : 68.5
▪ Pour Point / Flash Point °C		
32 : -39	, 236	
46 : -36	, 240	
68 : -39	, 244	
▪ ISO VG		
32 / 46 / 68		



Manufactured under Germany technology license 



LubC, Comp RS

LubC, Comp RS is formulated from synthetic base fluid utilizing synthetic hydrocarbon (PAO) with specially developed additive systems. Designed specifically for use in oil flood lubricated positive displacement rotary compressor. It will extend drain intervals up to 3 times longer than conventional mineral oils. (Max-change over time up to 12000 hr.)

Viscosity Index

32 : 140 46 : 140 68 : 135

Base Oil Vis. @ 40 °C

32 : 32.2 46 : 46.4 68 : 68.2

Pour Point / Flash Point °C

32 : -45 , 236

46 : -42 , 246

68 : -42 , 249

ISO VG

32 / 46 / 68



Manufactured
under Germany
technology license





LubC, Gear HP

LubC, Gear HP is an advanced industrial gear oil, designed primarily for the lubrication of heavy duty industrial gears. Its high load carrying capacity and anti-friction characteristics combine to offer superior performance in gears as well as suitability for lubrication of bearing and other components in circulating and splash lubricated systems.

- **Viscosity Index (approx.)**

95 / FZG Test : 12

- **Timken O.K Load (lbs)**

27

- **ISO VG**

68 / 100 / 150 / 220 / 320 / 460 / 680 / 1000



Manufactured
under Germany
technology license





LubC, Gear HP Plus

LubC, Gear HP Plus is an advanced industrial gear oil, designed primarily for the lubrication of heavy duty industrial gears. Its high load carrying capacity and anti-friction characteristics combine to offer superior performance particularly suitable for gear sets working under heavy to shock loads and in non-gear applications include highly loaded and slow speed plain and rolling contact bearings.

- **Viscosity Index (approx.)**

106

- **FZG Test**

> 12

- **Timken O.K Load (lbs)**

27

- **ISO VG**

220 / 320 / 460



Manufactured
under Germany
technology license 



LubC, Gear PA

LubC, Gear PA is a Poly Alpha Olefin based advanced synthetic heavy duty industrial gear oil as well as particularly suited for gear applications exposed to extreme service conditions , all type of enclosed gear, drives, bearings, including plain rolling elements and anti friction types, applications requiring High micro-pitting resistance.

- FZG Test

> 12

- Timken O.K Load (lbs)

> 67

- ISO VG

32 / 46 / 68 / 100 / 150 / 220 / 320 / 460 / 680 / 1000



Manufactured
under Germany
technology license 

LubC, Gear PG

LubC, Gear PG is a Poly Alkaline Glycol based on advanced synthetic heavy-duty industrial gear oil as well as particularly suited for gear applications exposed to extreme service conditions, all type of enclosed gear, drives, bearings, including plain rolling elements and anti friction types, applications requiring High micro-pitting resistance.

- FZG Test

> 12

- Timken O.K Load (lbs)

> 70

- ISO VG

100 / 150 / 220 / 320 / 460 / 680



Manufactured
under Germany
technology license 



LubC, Diesel HD

LubC, Diesel HD is a semi-synthetic, extra high-performance and long-life heavy duty diesel engine oil (HDEO), specifically developed for use in modern, low emission diesel engines, including those fitted with Exhaust Gas Re-circulation (EGR) systems, which their construction model is after 2004. It is blended from selected base stocks and new generation of high-performance additives.

Viscosity Index

10W30 : 183	10W40 : 153
15W40 : 139	20W50 : 123

Base Oil Vis. @ 40 °C

10W30 : 80	10W40 : 102
15W40 : 110	20W50 : 170

Pour Point °C

10W30 : -42	10W40 : -36
15W40 : -36	20W50 : -33



Manufactured under Germany technology license 



LubC, Diesel SD

LubC, Diesel SD is a semi-synthetic, extra high-performance and long-life severe duty diesel engine oil (HDEO), specifically developed for use in modern, low emission diesel engines, including those fitted with Exhaust Gas Re-circulation (EGR) systems which their construction model is after 2004. It is blended from selected base stocks and new generation of high-performance additives.

- **Viscosity Index**

15W40 : 125

- **Base Oil Vis. @ 40 °C**

15W40 : 120

- **Pour Point °C**

15W40 : -33



Manufactured
under Germany
technology license 



LubC, Diesel Gas LA

LubC, Diesel Gas LA is an advanced performance, premium quality, bright stock free, low ash, dispersant/detergent type engine oil. It provides outstanding oxidation and nitration resistance which minimize the build up insoluble and help provides long oil and filter life. It is particularly suited for four-stroke and selected two – stroke gas engines requiring good low temperature start ability.

- **Base Oil Vis. @ 40 °C**

142

- **Pour Point / Flash Point °C**

- 21 / 230

- **Viscosity Index**

106

- **Sulfated Ash , m %**

0.47

- **Base No, D 2896, mg KOH/g**

5.5



Manufactured
under Germany
technology license 



LubC, HTF Plus

LubC, HTF Plus is a semi-synthetic premium quality heat transfer fluid used in indirectly heated closed transfer systems where maximum bulk oil temperature is 350°C. This product formulated from carefully selected highly refined mineral oils fortified with high temperature oxidation inhibitors. Lub C HTF Plus benefits from excellent thermal cracking stability and high specific thermal conductivity.

Viscosity Index		
32 : 137	46 : 128	68 : 121
Base Oil Vis. @ 40 °C		
32 : 32.8	46 : 46.6	68 : 67.5
Pour Point / Flash Point °C		
32 : -33 / 242	46 : -30 / 250	68 : -30 / 255
Operating Temp. of Bulk °C Oil & Max. Oil Film Temp. °C		
340 / 350		
Total Acid Number		
0.01 Max		
ISO VG :		
32 / 46 / 68		



Manufactured under Germany technology license



LubC, Spin

LubC, Spin is formulated from highly refined mineral oil, anti-wear agents and rust and oxidation inhibitors. It is designed to provide outstanding oxidation and water separation protection for most general industrial bearing and circulating oil system applications as well as other certain industrial applications which don't require oil with extreme pressure properties.

▪ Pour Point / Flash Point °C		
5: -30/120	10: -30/150	22: -30/180
32: -27/226	46: -24/228	68: -21/250
100: -15/250	150: -15/265	220: -15/280
320: -12/286	460: -9/299	
680: -9/305		

▪ Rust Test , Distilled Water
PASS

▪ ISO VG
5/10/22/32/46/68/100/150/220/320/460/680

▪ Viscosity Index (Approx)		
5: 81	10: 83	22: 88
32: 110	46: 100	68: 100
100: 97	150: 95	220: 92
320: 96	460: 94	680: 95

▪ Base Oil Vis.@ 40 °C		
5: 5	10: 9.85	22: 22
32: 31.5	46: 45	68: 68
100: 101	150: 148	220: 218
320: 320	460: 470	680: 675



Manufactured under Germany technology license 



LubC, Paper mill

LubC, Paper mill is a premium performance circulating oil specially designed for use in the centralized lubrication system of paper machines, including wet-end system, dryer bearing and calendar stacks.

▪ Viscosity Index

150 : 96 220 : 96

▪ Base Oil Vis. @ 40 °C

150 : 152 220 : 225

▪ Pour Point / Flash Point °C

150 : -21/255 220 : -21/260

▪ ISO VG

150 / 220



Manufactured
under Germany
technology license 



LubC, ATF

LubC, ATF is a synthetic high performance automatic transmission fluid. Formulated by advanced additives for supporting requirements of general Motors (DEXRON-III H/M) and Ford, along with Allison C4 applications and Caterpillar TO-2. This product is suitable for use in both passenger cars and light trucks as well as guarantees perfect operation of hydraulic transmissions under extreme operating conditions and large temperature fluctuations.

▪ **Viscosity Index**

II : 168 III : 186

▪ **Base Oil Vis. @ 40 °C**

II : 35.5 III : 23.5

▪ **Pour Point °C**

II : -42 III : -48

▪ **SAE Grade**

75 W



Manufactured
under Germany
technology license 



LubC, Gear TF

LubC, GearTF is a high-performance gear lubricant, designed to provide excellent lubrication under severe conditions like high speed / shock load , high speed/low torque and low speed / high torque in the wide range of manual auto motives transmissions, axels and final drives. It is recommended for on light and heavy duty trucks, and off highway equipment in construction, mining and agricultural.

▪ Viscosity Index

75W80 : 165	75W90 : 178	80W90 : 108
85W90 : 103	85W140 : 98	

▪ Base Oil Vis. @ 40 °C


75W90 : 53.6	75W90 : 85.6	80W90 : 138
85W90 : 172	85W140 : 435	

▪ Pour Point °C

75W80 : -48	75W90 : -45	80W90 : -39
85W140 : -36	85W140 : -15	



Manufactured under Germany technology license 

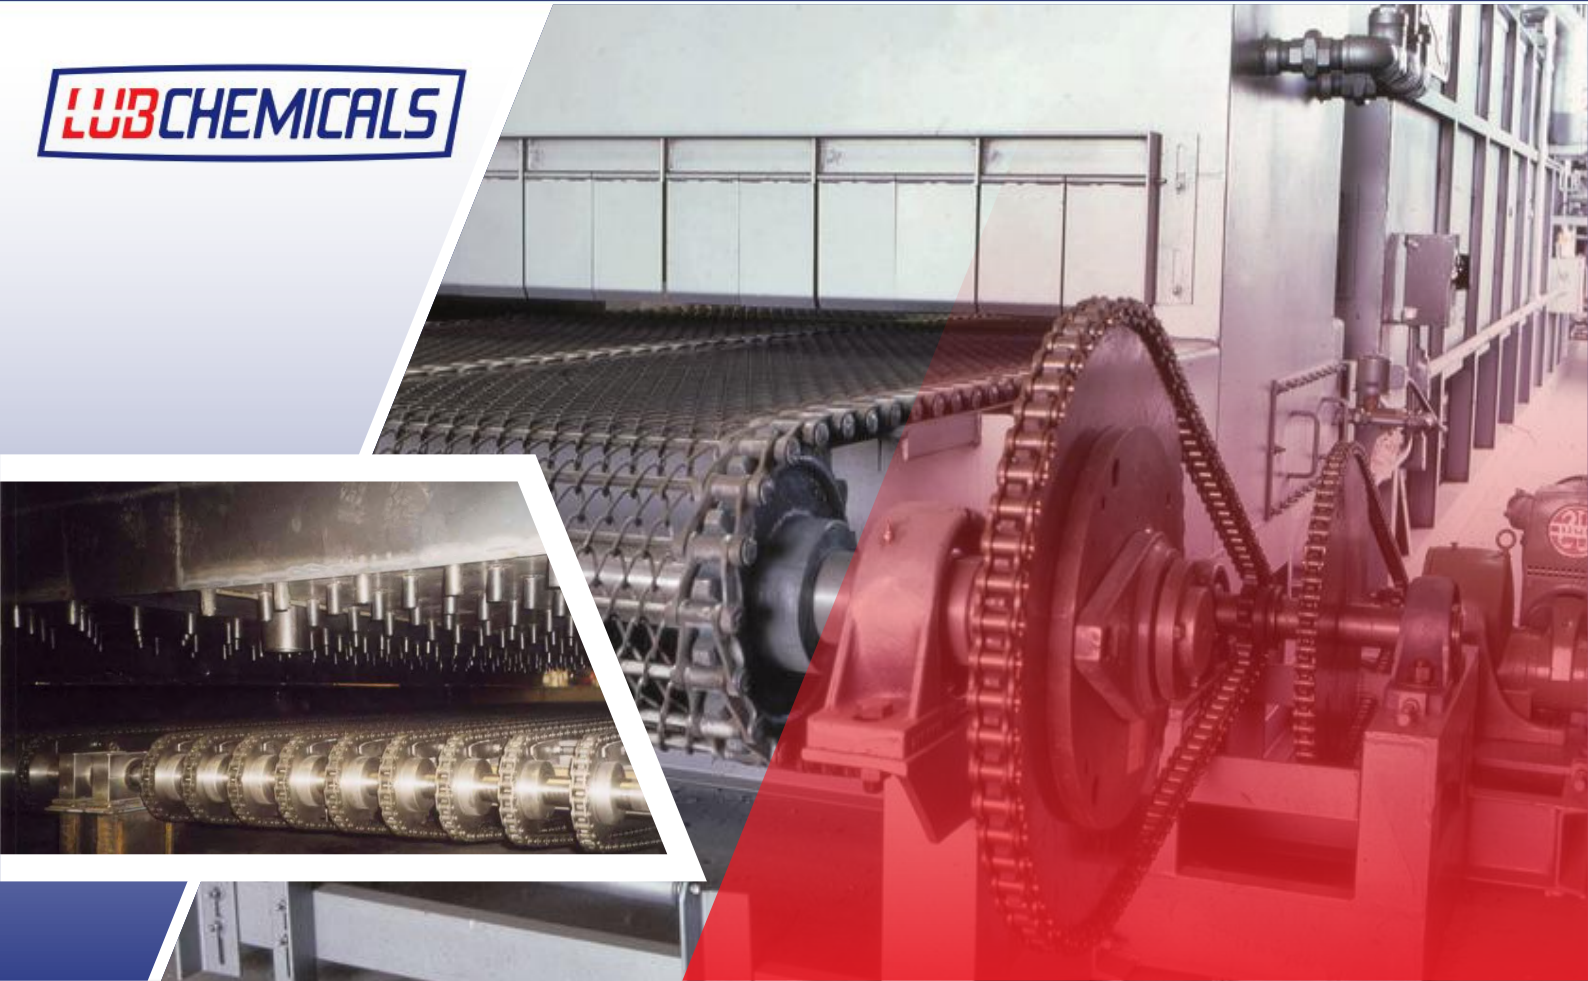

LubC, Chain ST

lubC, Chain ST is a fully synthetic, silicone-free high performance lubricant based on saturated complex esters with high thermal stability and a special additive composition to improve ageing, corrosion and wear protection. Preferably used for the lubrication of thermally highly loaded conveyor and driving chains in kilns, driers and other similar equipment.

- **Base Oil Vis. @ 40 °C**

250

- **Pour Point / Flash Point °C**

- 45 / ≥ 255

- **Base Oil**

Ester

- **Viscosity Index**

121

- **Service temperature**

up to +250°C

- **ISO VG**

250



Manufactured
under Germany
technology license 

LubC, Grease L

LubC, Grease L is based on premium base oil, using lithium soaps as thickener. The grease contains antioxidants, corrosion inhibitors and AW additives. It is suitable for universal use in industry and the field of motor vehicles, specially designed for use in roller bearings of electric motors and alternators as well as it can be used in temperatures less than -30°C .

- **Thickener**

Lithium

- **Base Oil**

Mineral

- **Service Temp. $^{\circ}\text{C}$**

-30°C to $+120^{\circ}\text{C}$ (Max $+130^{\circ}\text{C}$)

- **NLGI Grade**

1/2/3

- **4 Ball Weld Load**

2000 N



Manufactured
under Germany
technology license 



LubC, Grease L Plus

LubC, Grease L Plus is based on premium base oil, using lithium soaps as thickener. The grease contains antioxidants, corrosion inhibitors and AW additives. It is suitable for universal use in industry and the field of motor vehicles, specially designed for use in roller bearings of electric motors and alternators as well as it can be used in temperatures less than -30°C .

- **Thickener**

Lithium

- **Base Oil**

Mineral

- **Service Temp. $^{\circ}\text{C}$**

-30°C to $+120^{\circ}\text{C}$ (Max $+130^{\circ}\text{C}$)

- **NLGI Grade**

1/2/3

- **4 Ball Weld Load**

2000 N



Manufactured
under Germany
technology license





LubC, Gear EP

The grease made on the basis of lithium, high-quality base oil and additives has anti-oxidation, anti-corrosion and anti-wear properties, which is recommended for general use in industry and motor vehicles, especially for use in roller bearings of electric motors, electropumps and capacitors.

- **Thickener**

Lithium

- **Base Oil**

Mineral

- **Service Temp. °C**

-20°C to +120°C (Max +130°C)

- **NLGI Grade**

000 / 00 / 0 / 1 / 2 / 3


- **4 Ball Weld Load**

2600 N



Manufactured
under Germany
technology license



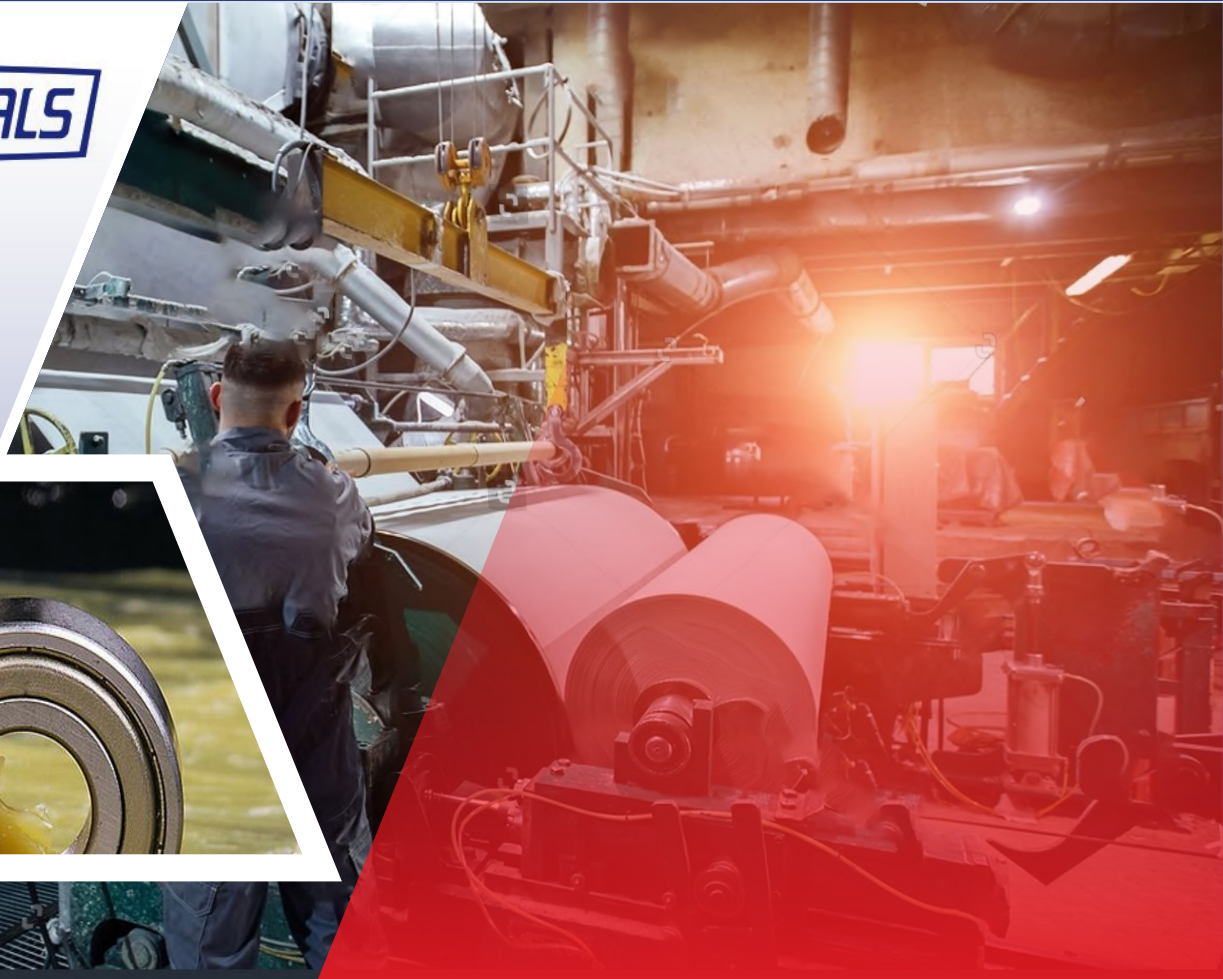

LubC, Gear EP Plus

The grease made on the basis of lithium, high-quality base oil and additives has anti-oxidation, anti-corrosion and anti-wear properties, which is recommended for general use in industry and motor vehicles, especially for use in roller bearings of electric motors, electropumps and capacitors.

- **Thickener**

Lithium

- **Base Oil**

Mineral

- **Service Temp. °C**

-20°C to +120°C (Max +130°C)

- **NLGI Grade**

000 / 00 / 0 / 1 / 2 / 3

- **4 Ball Weld Load**

2600 N



Manufactured
under Germany
technology license 



LubC, Grease LC SD

The grease made on the basis of lithium, high-quality base oil and additives has anti-oxidation, anti-corrosion and anti-wear properties which is recommended for general use in industry and motor vehicles, especially for use in roller bearings of electric motors, electropumps and capacitors.

- Thickener**
 Lithium
- Base Oil**
 Mineral
- Service Temp. °C**
 -20°C to +130°C (Max +140°C)
- NLGI Grade**
 000 / 00 / 0 / 1 / 2 / 3
- 4 Ball Weld Load**
 2800 N



Manufactured under Germany technology license 



LubC, Grease LC HD

The grease made on the basis of lithium, high-quality base oil and additives has anti-oxidation, anti-corrosion and anti-wear properties which is recommended for general use in industry and motor vehicles, especially for use in roller bearings of electric motors, electropumps and capacitors.

- **Thickener**

Lithium-Calcium

- **Base Oil**

Mineral

- **Service Temp. °C**

-20°C to +130°C (Max +140°C)

- **NLGI Grade**


2

- **4 Ball Weld Load**

4300 N



Manufactured
under Germany
technology license 

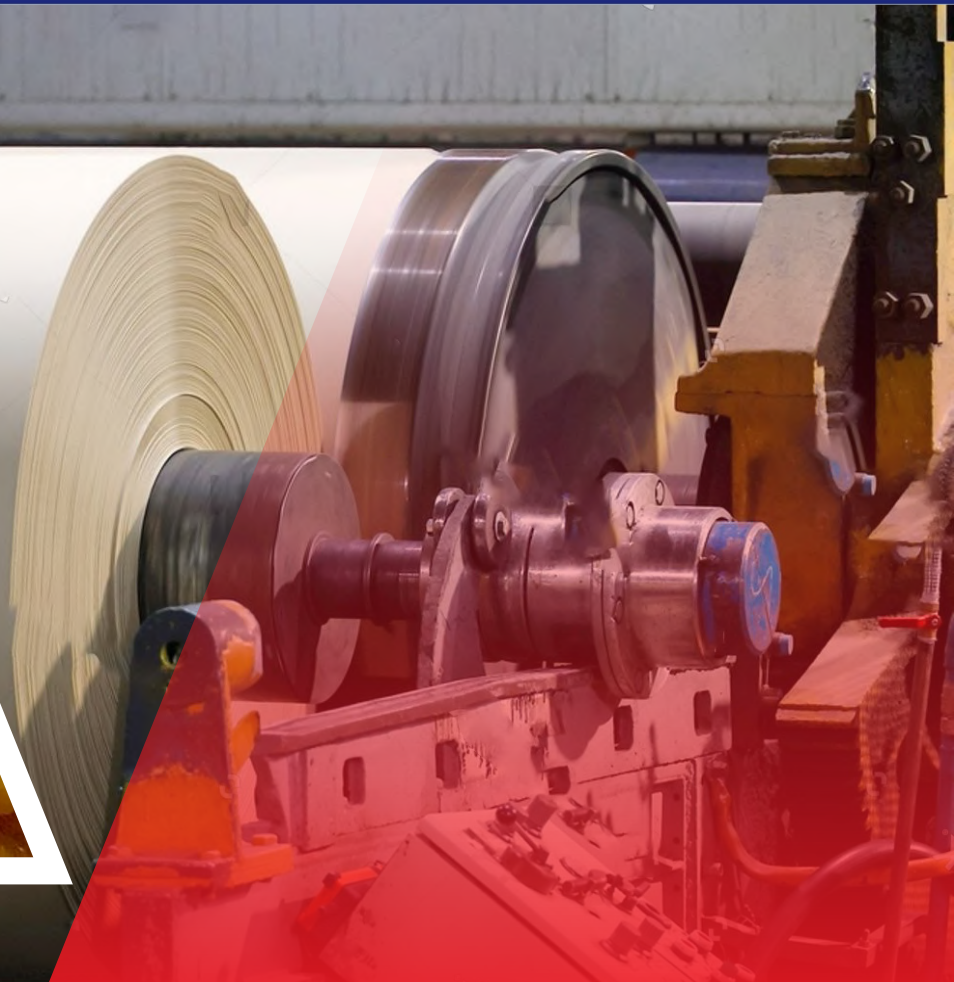

LubC, Grease LC Moly EP

Grease LC Moly EP is a quality lithium calcium based grease that has modern polymer technology and has a high level of mechanical stability and adhesion, suitable for automotive, agricultural, industrial and marine applications where things like high loads, water washing and material wear are known to be a problem.

- **Thickener**
Lithium-Calcium
- **Base Oil**
Mineral
- **Service Temp. °C**
-20°C to +130°C (Max +140°C)
- **NLGI Grade**
2
- **4 Ball Weld Load**
4300 N



Manufactured under Germany technology license 



LubC, Grease L Plex

LubC, Grease Lplex is based on high viscosity index mineral oil which lithium complex soap has thickened grease, containing performance additives. It is suitable for use in electric motor bearings such as those used in the paper mill industry, air blowers and as a multipurpose grease for lightly loaded ball bearing applications either operating at high temperature or when extended regreasing interval are required.

- **Thickener**

Lithium Complex

- **Base Oil**

Mineral

- **Service Temp. °C**

-30°C to +160°C (Max +200°C)

- **NLGI Grade**

1/2/3

- **Dropping Point**

260<



Manufactured
under Germany
technology license 



LubC, Grease L Plex Plus

LubC, Grease Lplex plus is based on high viscosity index mineral oil which lithium complex soap has thickened grease, containing performance additives. It is suitable for use in electric motor bearings such as those used in the paper mill industry, air blowers and as a multipurpose grease for lightly loaded ball bearing applications either operating at high temperature or when extended regreasing interval are required.

- **Thickener**

Lithium Complex

- **Base Oil**

Mineral

- **Service Temp. °C**

-30°C to +180°C (Max +200°C)

- **NLGI Grade**


1/2/3

- **Dropping Point**

260<



Manufactured
under Germany
technology license 

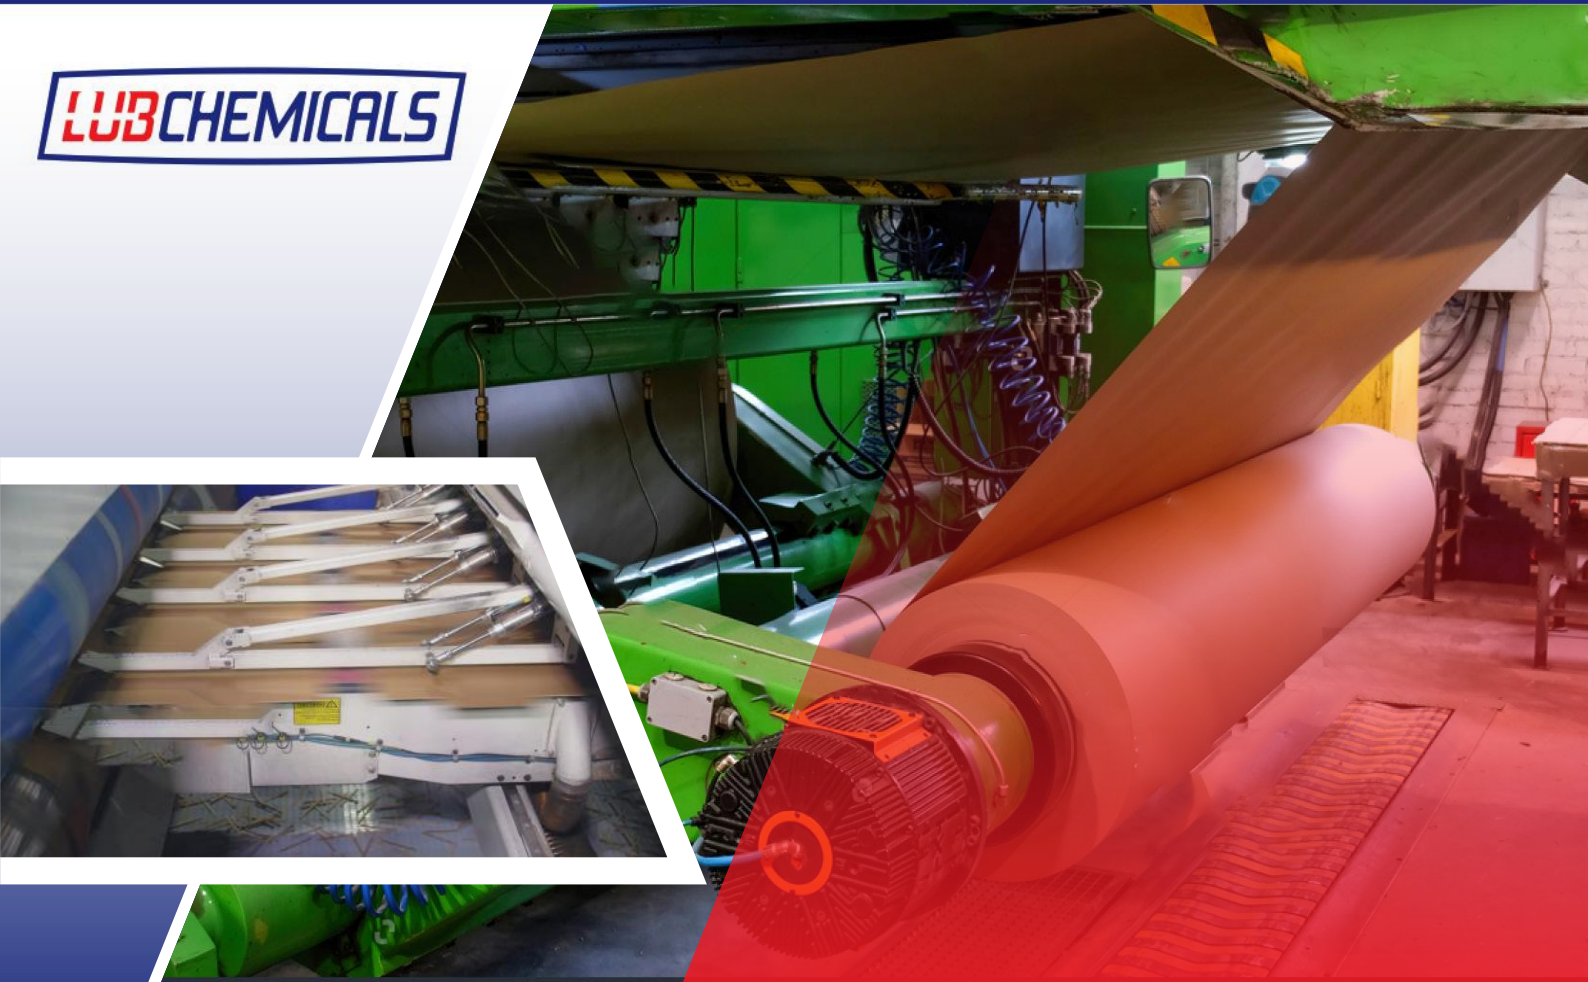

LubC, Grease C Plex EP

LubC, Grease C Plex EP is a premium quality, water resistant calcium Complex grease for use in industrial and marine applications where the presence of water and humid atmospheres can effect lubricating performance and be detrimental to the protection of parts from corrosion. It is recommended for use in water pumps, rolling mills, mines, quarries and marine equipment where salt or fresh water spray or ingress is unavoidable.

- **Thickener**
Calcium Complex
- **Base Oil**
Mineral
- **Service Temp. °C**
-25°C to +140°C
- **NLGI Grade**
1/2
- **4 Ball Weld Load**
3000 N



Manufactured
under Germany
technology license 



LubC, Grease CS Plex

LubC, Grease CS Plex is a calcium sulfonate complex thickened lubricating grease based on mineral oil. The grease contains antioxidants and corrosion inhibitors. It is recommended for use in industrial equipment operating at high temperatures or exposed to salt water which makes it a high performance premium grease. It is recommended for use in industrial equipment operating at high temperatures or exposed to salt water.

- **Thickener**

Calcium Sulfonate Complex

- **Base Oil**

Mineral

- **Service Temp. °C**

-20°C to +160°C (Max +200°C)

- **NLGI Grade**

1/1.5/2

- **4 Ball Weld Load**

6500 N



Manufactured
under Germany
technology license 



LubC, Grease PU Plus

LubC, Grease PU Plus is a thickened by polyurea base thickener. It is made from deeply refined mineral oil with anti-corrosion protection and anti-wear additives which gives good pumpability properties for use in the centralized lubrication systems of equipment operating in the steel industry, like continuous casting machines, continuous rolling machines and other high temperature friction points in the steel industry.

- **Thickener**

Poly urea

- **Base Oil**

Mineral

- **Base Oil VG**

100

- **Service Temp. °C**

-20°C to +200°C (MAX +220)

- **NLGI Grade**

1/1.5/2/3

- **4 Ball Weld Load**

2550 N



Manufactured
under Germany
technology license






LubC, Grease Al Plex OG

LubC, Grease ALPlex OG is aluminum complex saponified grease based on mineral oil. It contains fine grade graphite as well as designed for automatic spray lubrication of toothed wheels, gear rings, toothed racks and pinions of any kind under high pressure and temperature operations. It suits for lubrication of rotary furnaces or similar hot lubricating points even under dusty and wet conditions.

<ul style="list-style-type: none"> ▪ Thickener AL Complex 	<ul style="list-style-type: none"> ▪ 4 Ball Weld Load > 7000 N
<ul style="list-style-type: none"> ▪ Base Oil Mineral 	<ul style="list-style-type: none"> ▪ FZG Test > 12
<ul style="list-style-type: none"> ▪ Service Temp. °C -20 °C to +160 °C (Max +200°C) 	<ul style="list-style-type: none"> ▪ Base Oil VG 500 , 1000 , 2500
<ul style="list-style-type: none"> ▪ NLGI Grade 0 / 00 	



Manufactured under Germany technology license 

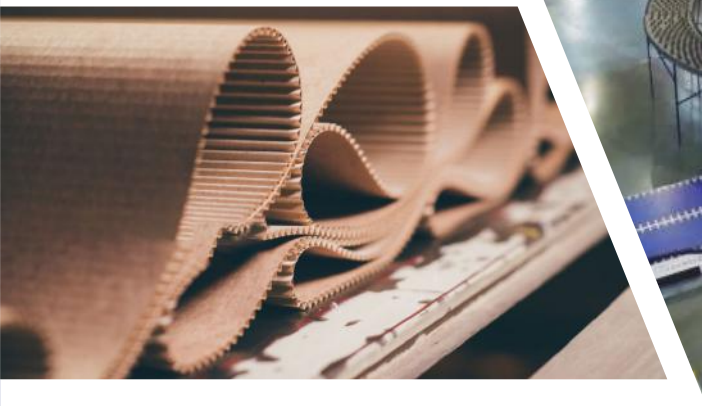

LubC, Grease PU SPA HV Plus

Polyurea grease is a synthetic hydrocarbon oil (PAO) designed for various lubrication applications in a variety of operating conditions, especially where operating temperatures are high and the use of conventional polyurea greases is limited. This grease is recommended for use in industrial equipment where low/high speed and humidity are considered a problem.

- **Thickener**

Poly urea

- **Base Oil**

Synthetic

- **Service Temp. °C**

-50°C to +200°C (MAX +240)

- **NLGI Grade**

3

- **Drop Point °C**

>260



Manufactured
under Germany
technology license



Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC, Hydraulic M 22	Shell Tellus S2 MX 22	بهران هیدرولیک H22
LubC, Hydraulic M 32	Shell Tellus S2 MX 32	بهران هیدرولیک H32
LubC, Hydraulic M 46	Shell Tellus S2 MX 46	بهران هیدرولیک H46
LubC, Hydraulic M 68	Shell Tellus S2 MX 68	بهران هیدرولیک H68
LubC, Hydraulic M 100	Shell Tellus S2 MX 100	بهران هیدرولیک H100
LubC, Hydraulic M 150	Shell Tellus S2 MX 150	بهران هیدرولیک H150
LubC, Hydraulic MZ 15	Shell Tellus S3 M 15	بهران هیدرولیک HP15
LubC, Hydraulic MZ 22	Shell Tellus S3 M 22	بهران هیدرولیک HP22
LubC, Hydraulic MZ 32	Shell Tellus S3 M 32	بهران هیدرولیک HP32
LubC, Hydraulic MZ 46	Shell Tellus S3 M 46	بهران هیدرولیک HP46
LubC, Hydraulic MZ 68	Shell Tellus S3 M 68	بهران هیدرولیک HP68
LubC, Hydraulic MZ 100	Shell Tellus S3 M 100	بهران هیدرولیک HP100
LubC, Hydraulic T 10	Shell Tellus S2 VX 10	بهران هیدرولیک T10
LubC, Hydraulic T 15	Shell Tellus S2 VX 15	بهران هیدرولیک T15
LubC, Hydraulic T 22	Shell Tellus S2 VX 22	بهران هیدرولیک T22
LubC, Hydraulic T 32	Shell Tellus S2 VX 32	بهران هیدرولیک T32
LubC, Hydraulic T 46	Shell Tellus S2 VX 46	بهران هیدرولیک T46
LubC, Hydraulic T 68	Shell Tellus S2 VX 68	بهران هیدرولیک T68
LubC, Hydraulic T 100	Shell Tellus S2 VX 100	بهران هیدرولیک T100
LubC, Hydraulic TZ 10	Shell Tellus S3 VX 10	-
LubC, Hydraulic TZ 15	Shell Tellus S3 VX 15	-
LubC, Hydraulic TZ 22	Shell Tellus S3 VX 22	-
LubC, Hydraulic TZ 32	Shell Tellus S3 VX 32	-
LubC, Hydraulic TZ 46	Shell Tellus S3 VX 46	-
LubC, Hydraulic TZ 68	Shell Tellus S3 VX 68	-
LubC, Hydraulic TZ 100	Shell Tellus S3 VX 100	-
LubC, Hydraulic TPlus 10	Fuchs Renolin B 10 HVI	بهران هیدرولیک TX10
LubC, Hydraulic TPlus 15	Fuchs Renolin B 15 HVI	بهران هیدرولیک TX15

Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC, Hydraulic TPlus 22	Fuchs Renolin B 22 HVI	بهران هیدرولیک TX 22
LubC, Hydraulic TPlus 32	Fuchs Renolin B 32 HVI	بهران هیدرولیک TX 32
LubC, Hydraulic TPlus 46	Fuchs Renolin B 46 HVI	-
LubC, Hydraulic TPlus 68	Fuchs Renolin B 68 HVI	بهران هیدرولیک TX 68
LubC, Hydraulic TPlus 100	Fuchs Renolin B 100 HVI	بهران هیدرولیک TX 100
LubC, Hydraulic TZPlus 10	-	-
LubC, Hydraulic TZPlus 15	-	-
LubC, Hydraulic TZPlus 22	-	-
LubC, Hydraulic TZPlus 32	-	-
LubC, Hydraulic TZPlus 46	Fuchs Renolin ZAF 46 MC	بهران هیدرولیک TX 46
LubC, Hydraulic TZPlus 68	-	-
LubC, Hydraulic TZPlus100	-	-
LubC, Comp R Plus 32	Shell Corena S3 R 32	بهران کمپرسور VDL 32
LubC, Comp R Plus 46	Shell Corena S3 R 46	بهران کمپرسور VDL 46
LubC, Comp R Plus 68	Shell Corena S3 R 68	بهران کمپرسور VDL 68
LubC, Comp R Plus 100	Shell Corena S3 R 100	بهران کمپرسور VDL 100
LubC,CompSuperRPlus 32	Shell Corena S4 R 32	بهران کمپرسور PS 32
LubC,CompSuperRPlus 46	Shell Corena S4 R 46	بهران کمپرسور PS 46
LubC,CompSuperRPlus 68	Shell Corena S4 R 68	بهران کمپرسور PS 68
LubC,CompSuperRPlus100	Shell Corena S4 R 100	بهران کمپرسور PS 100
LubC, Comp R S 32	Shell Corena S4 R 32	بهران کمپرسور PS 32
LubC, Comp R S 46	Shell Corena S4 R 46	بهران کمپرسور PS 46
LubC, Comp R S 68	Shell Corena S4 R 68	بهران کمپرسور PS 68
LubC, Comp R S 100	Shell Corena S4 R 100	بهران کمپرسور PS 100
LubC,Gear HP 32	Shell Omala S2 GX 32	بهران بردبار 32
LubC,Gear HP 46	Shell Omala S2 GX 46	بهران بردبار 46
LubC,Gear HP 68	Shell Omala S2 GX 68	بهران بردبار 68

Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC,Gear HP 100	Shell Omala S2 GX 100	بهران بردبار 100
LubC,Gear HP 150	Shell Omala S2 GX 150	بهران بردبار 150
LubC,Gear HP 220	Shell Omala S2 GX 220	بهران بردبار 220
LubC,Gear HP 320	Shell Omala S2 GX 320	بهران بردبار 320
LubC,Gear HP 460	Shell Omala S2 GX 460	بهران بردبار 460
LubC,Gear HP 680	Shell Omala S2 GX 680	بهران بردبار 680
LubC,Gear HP 1000	Shell Omala S2 GX 1000	بهران بردبار 1000
LubC,Gear HP Plus 68	Shell Omala F 68	بهران بردبار F 68
LubC,Gear HP Plus 100	Shell Omala F 1Shell Omala F 100	بهران بردبار F 100
LubC,Gear HP Plus 150	Shell Omala F 150	بهران بردبار F 150
LubC,Gear HP Plus 220	Shell Omala F 220	بهران بردبار F 220
LubC,Gear HP Plus 320	Shell Omala F 320	بهران بردبار F 320
LubC,Gear HP Plus 460	Shell Omala F 460	بهران بردبار F 460
LubC,Gear HP Plus 680	Shell Omala F 680	بهران بردبار F 680
LubC,Gear HP Plus 1000	Shell Omala F 1000	بهران بردبار F 1000
LubC,Gear PA 32	Mobil SHC 624	-
LubC,Gear PA 46	Mobil SHC 625	-
LubC,Gear PA 68	Mobil SHC 626	-
LubC,Gear PA 100	Mobil SHC 627	-
LubC,Gear PA 150	Mobil SHC 629	بهران بردبار PS 150
LubC,Gear PA 220	Mobil SHC 630	بهران بردبار PS 220
LubC,Gear PA 320	Mobil SHC 632	بهران بردبار PS 320
LubC,Gear PA 460	Mobil SHC 634	بهران بردبار PS 460
LubC,Gear PA 680	Mobil SHC 636	بهران بردبار PS 680
LubC,Gear PA 1000	Mobil SHC 639	بهران بردبار PS 1000
LubC,Gear PG 68	Shell Omala S4 WE 68	-
LubC,Gear PG 100	Shell Omala S4 WE 100	بهران بردبار PG100

Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC, Gear PG 150	Shell Omala S4 WE 150	بهران بردبار PG150
LubC, Gear PG 220	Shell Omala S4 WE 220	بهران بردبار PG220
LubC, Gear PG 320	Shell Omala S4 WE 320	بهران بردبار PG320
LubC, Gear PG 460	Shell Omala S4 WE 460	بهران بردبار PG460
LubC, Gear PG 680	Shell Omala S4 WE 680	بهران بردبار PG680
LubC, Gear PG 1000	Shell Omala S4 WE 1000	بهران بردبار PG1000
LubC, Diesel HD 10W40	Shell Rimula R6 LM 10W40	بهران اکسترا توربو دیزل 10W40
LubC, Diesel HD 15W40	Shell Rimula R6 LM 15W40	بهران اکسترا توربو دیزل 15W40
LubC, Diesel HD 20W40	Shell Rimula R1 Multi 20w40	بهران توربو دیزل 20W50
LUBC, DIESEL HD 20W50	Shell Rimula R4X 20W50	بهران توربو دیزل 20W50
LubC, Diesel SD 15W40	Shell Rimula R4X 15W40	بهران سوپر توربو دیزل 15W40
LubC, Diesel SD 20W40	-	-
LubC, Diesel SD 25W50	-	-
LubC, Spin 5	Shell Morlina S2 BL 5	-
LubC, Spin 10	Shell Morlina S2 BL 10	بهران درفش 10
LubC, Spin 15	Shell Morlina S2 BL 15	-
LubC, Spin 22	Shell Morlina S2 BL 22	-
LubC, Spin 32	Shell Morlina S2 BL 32	بهران درفش 32
LubC, Spin 46	Shell Morlina S2 BL 46	بهران درفش 46
LubC, Spin 68	Shell Morlina S2 BL 68	بهران درفش 68
LubC, Spin 100	Shell Morlina S2 BL 100	بهران درفش 100
LubC, Spin 150	Shell Morlina S2 BL 150	بهران درفش 150
LubC, Spin 220	Shell Morlina S2 BL 220	بهران درفش 220
LubC, Spin 320	Shell Morlina S2 BL 320	بهران درفش 320
LubC, Spin 460	Shell Morlina S2 BL 460	بهران درفش 460
LubC, ATF 2	Shell Spirax S2 ATF DII	بهران اتوماتیک II
LubC, ATF 3	Shell Spirax S3 ATF MD3	بهران اتوماتیک III

Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC, ATF 4	-	-
LubC, ATF 5	-	-
LubC, ATF 6	-	-
LubC,Gear TF 75W80	Shell Spirax S3 AX 75W80	بهران سمند ویژه 75W80
LubC,Gear TF 75W90	Shell Spirax S3 AX 75W90	بهران سمند ویژه 75W90
LubC,Gear TF 80W90	Shell Spirax S3 AX 80W90	بهران سمند ویژه 80W90
Lub C,Gear TF 85W90	Shell Spiral S3 AX 85W90	بهران سمند ویژه 85W90
LubC,Gear TF 85W140	Shell Spirax S3 AX 85W140	بهران سمند ویژه 85W140
LubC,Gear TF 85W250	-	-
LubC,Gear TF 90W	-	MB90
LubC,Gear TF 140W	-	-
LubC, Chain ST 250	Bechem Berusynth CU 250-Kluber	-
LubC,Grease L 1	Shell Gadus S2 V100- 1	بهران یاقوت 1
LubC,Grease L 2	Shell Gadus S2 V100- 2	بهران یاقوت 2
LubC,Grease L 3	Shell Gadus S2 V100- 3	بهران یاقوت 3
LubC,Grease LC2	Shell Gadus S2 V220- AC 2 -2	-
LubC,Grease LC HD2	Shell Gadus S2 V220- AC 2 -2	-
LubC,Grease LC SD2	Shell Gadus S2 V220- AC 2 -2	-
LubC,Grease L Plex 1	Shell Gadus S3 V100- 1	-
LubC,Grease L Plex 2	Shell Gadus S3 V100- 2	-
LubC,Grease L Plex 3	Shell Gadus S3 V100- 3	-
LubC,Grease L Plex Plus1	-	-
LubC,Grease L Plex Plus2	-	-
LubC,Grease L Plex Plus3	-	-
LubC,Grease PU Plus 1.5	Bechem Berutox M 21 KN 1.5	-
LubC,Grease PU Plus 2	Bechem Berutox M 21 KN 2	-
LubC,Grease PU Plus 3	Bechem Berutox M 21 KN 3	-

Equivalent

LubChemicals	Equivalent	معادل ایرانی
LubC,GreaseALPlexOG500	Behem Brulit GA 400	-
LubC,GreaseALPlexOG1000	Behem Brulit GA 800	-
LubC,GreaseALPlexOG2500	Behem Brulit GA 2500	-
LubC,Grease CPlexEP1	-	بهران زمرد
LubC,Grease CPlex EP2	Bruplex CS 2 EP	بهران زمرد
LubC,Grease CPlex EP3	-	بهران زمرد
LubC,Grease CSPlex1	Total Ceran HV1	-
LubC,Grease CSPlex2	Total Ceran HV2	-

Our products are certified to meet all necessary requirements

LUBCHEMICALS understands that above issue is key to the development of the organization which this policy establishes the following main points:

1- Continuous improvement of the quality in products and services, environmental management system and safety system.

2- Fulfilment of the existing legislation.

3- Training of employees and stakeholders as an essential element for the development of the organization and achieving full integration and participation.

4- Meeting the needs of our customers, achieving our own personal satisfaction, and getting to consolidate and improve our competitiveness and our expansion in the market by:

- Prioritize error prevention rather than correction.
- Enhancing production planning to maximize the performance of the facilities.
- Providing the necessary resources for the improvement of process control.
- Minimize residues, improving the maintenance and cleanliness of the plant.

5- To develop our activity with the utmost respect for the protection for the environment:

- Identification and secure the proper management of environmental aspects.
- Minimize waste.
- Pollution prevention, and when not possible, minimize the environmental impact.
- Incorporate environmental criteria into the business management.

6- Ensuring safety protection at work:

- Identify and prevent occupational hazards.
- Having the appropriate facilities, equipment and tools.
- Encourage coordination with the staff for the risk management.
- Incorporating safety criteria into the management of the business itself.

LUBCHEMICALS wishes to promote this policy and encourages all the organization and other parties concerned to comply with it.

Services

On a basic rule our engineers support customers and distributors with all sorts of technical topics.

- LUBCHEMICALS Product advices
- Optimization of lubrication consumptions and intervals
- Rationalization of products the number of products being used
- Technical engineering services
- Used oil analysis program
- Technical consulting while site visiting



Professional Lubrication



Rembrandtstr. 80 | 70567 Stuttgart-Germany
Tel. 0049 711 235450 | 0049 711 235464 | Fax:0049 711 2360553
WWW.lubchemicals.com | lube@lubchemicals.com